


## 2C333 Double Radio-interference suppression capacitors

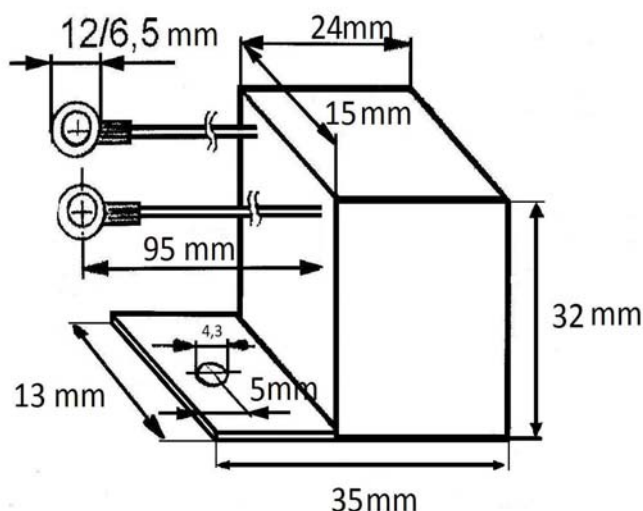

### Construction:

Metallized polypropylene film capacitors noninductive type. Self - healing ability. Special plastic case with metallic mounting clmp, epoxy resin sealed, Stranded wire leads 0,75mm<sup>2</sup>x 95mm, concluded with the lugs, other length or other form of the leads on request available flame retards case (UL 94 V-0)

### Reference standards:

IEC 60384-14  
Certificatet by IECCE-CB CZ1408

**Rated voltage:** 250V; 50/60 Hz

**Rated capacity:** 2x0,1uF  
other capacity on request available

**Tolerance:** ±20% (M) ±10 % (K)

**Climatic category:** 40/100/56  
according to IEC 60068 – 1

**Temperature range:** -40°C ÷ +100°C

**Dielectric loss at 100Hz:** 0,001

### Insulation resistance:

Ris > 10GΩ at 20°C,  
Um= 100 VDC after 1 min charging

**Test voltage between the leads:** 1600VDC 2sec  
other tests in accordance to IEC 60384-14

### Marking for purchase ordering:

2C333 2x0,1 uF ±10% 250V/50Hz

**Warning!** The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, pleas, read carefully this technical data-sheet.