



Radiointerference suppression capacitors class **X1** C 338 OR 275VAC

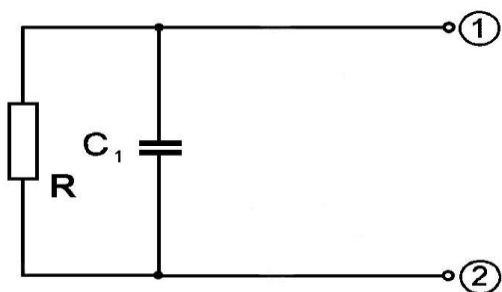

Dimensions:

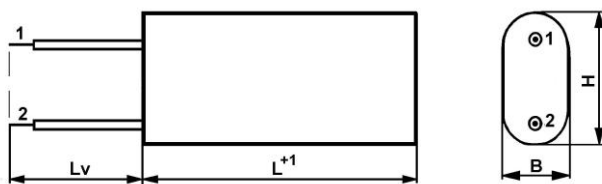

C _R [uF]*	Dimensions ⁺¹ [mm]					ID/Artikel
	B	H	L	R [MΩ]	Lv	
0,1	23	13	32	1	150	10632/
0,15	23	13	32	1	150	10633/X0243
0,2	23	13	32	1	150**	9364/

*Other capacity on request ** Other Lv on request

Warning! The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, pleas, read carefully this technical data-sheet.

Construction:

Metallized polypropylene film capacitors
noninductive type.
Self - healing ability. Plastic case, epoxy resin sealed,
flame retards case (UL 94 V-0)
The Capacitor include the discharging resistor 1MΩ
The leads: tined cooper wire or insulated stranded
wire, the length on request – see the table

Reference standards:

IEC 60384 -14, EN 60384 - 14

Rated voltage: 275V 50/60 Hz

Rated capacitance: 0,1uF ÷ 0,2uF

Tolerance: ±20% (M) ±10 % (K)

Class: X1

Climatic category: 55/85/56

according to IEC 60068 - 1

Temperature range: -55°C ÷ +85°C

Insulation resistance:

R_{is} > 30 000/C MΩ/uF at 20°C,
U_m= 100 VDC after 1 min charging

Test voltage between the leads: 2xU_R+1500V
other tests in accordance to IEC 60384-14

**Test voltage between the connected leads
and the surface of the box:** 3000V/50Hz 1 min.

Marking for purchase ordering:

C338OR 0,2uF ±10% R 1MΩ, 6,5A 275V 50/60Hz