


MKP390R CAPACITORS FOR AC APPLICATIONS

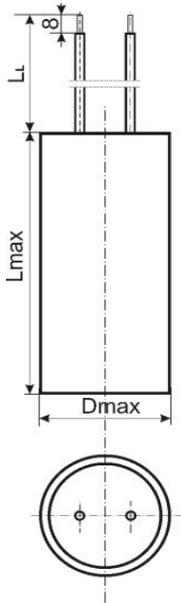

Capacity C_R [μF]	Dimensions [mm]		
	D	L	L_L
42	45	69	200
60	50	69	200
90	60	69	200
120	65	69	200

Other capacity and other L_L on request

Warning! The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, please, read carefully this technical data-sheet.

Construction:

Metallized polypropylene film, non-inductive, self-healing construction, plastic cylindrical flame retardant case, with bottom screw available

Applications:

Motor run-capacitors and other AC applications

Technical data

Rated voltage U_R : 125VAC 50/60Hz

If the working frequency is higher, the permissible AC voltage must be decreased

Rated capacitance: $40 \pm 120 \mu\text{F}$

Tolerance: $\pm 10\%$, $\pm 5\%$, other tolerance on request

Dissipation factor $Tg\delta$: $< 0,001$ at 100Hz and $+25^\circ\text{C}$



Insulation resistance R_{IS} : $> 10\,000/\text{C}$ [$\text{M}\Omega$; μF]

Operating temperature range: $-40 \div +85^\circ\text{C}$

The highest permissible capacitor temperature at the hottest point of the case must not exceed $+85^\circ\text{C}$.

Operating life expectancy: 10 000h/125V 50Hz, Class B, Test conditions $1,25xU_R$ at $+85^\circ\text{C}$, 2000h

Life expectancy:

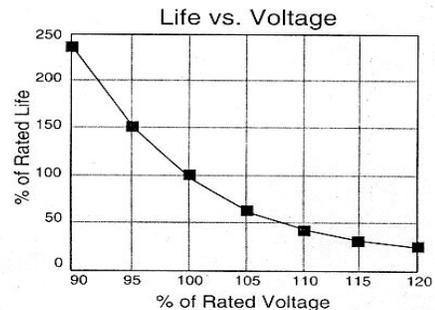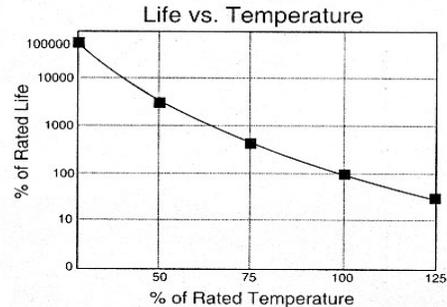

Test voltage between terminals: $2 \times U_R$, 1min. at $+25^\circ\text{C}$ All capacitors are tested by the routine test by the producer

Protection against Over-voltages:

The capacitors are self-healing and regenerate themselves after occasional breakdowns. The capacitor remains fully functional after the breakdown.

Permitted Over-voltages in working conditions:

$1,1 \times U_R$ max. 10% of the service period
If the Over-voltages exceed the permissible values above, the capacitor might have been destroyed.

Test voltage between terminals and case:

3000VDC, 1min. at $+25^\circ\text{C}$

Max. repetitive rate of voltage rise dU/dt :

$< 20\text{V}/\mu\text{sec}$ at U_R and $+25^\circ\text{C}$

Related standards: IEC 60252

Marking for purchase ordering:

MKP1390R 40 μF +5% 125V 50/60Hz