
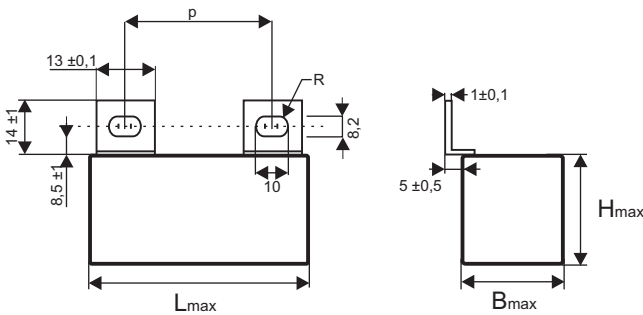


# KPI 300-105

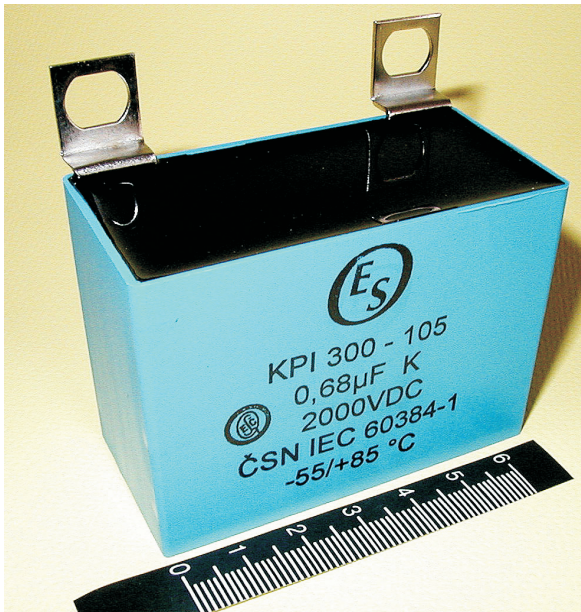

Capacit. $C_R$ [µF]	$U_R$ [DC/AC]	Dimension [mm]			
		B	H	L	p
0,68	2000/660	35	50	70	56

## Construction:

Metallized polypropylene film, Non-inductive, self-healing construction. Plastic prismatic flame retardant case.

## Applications:

Snubber capacitors, all other AC and DC applications

## Technical data

### Rated voltage $U_R$ : 2000 VDC

Rated voltage is the max. DC or peak voltage, for which the capacitor is designed.

If the capacitor works with the DC and also super-imposed AC voltage  $U_{AC}$ , the sum of DC and the amplitude of AC must not exceed the  $U_R$

### Max permissible AC voltage:

If the working frequency is higher, the permissible AC voltage must be decreased, not to exceed the max. loss power of the capacitor.

$$\text{Max. } U_{AC(f)} = \sqrt{\frac{P_L}{2\pi f C_R \times \text{tg}\delta}}$$

### Rated capacitance: 0,68 µF

Tolerance: 10%, 5%

Dissipation factor  $\text{Tg}\delta$ : < 0,001 at 1kHz and +25°C

Insulation resistance  $R_{i,s}$ : >10 000/C [MΩ]

Operating temperature range: -55 ÷ +85°C

The highest permissible capacitor temperature at the hottest point of the case must not exceed +85°C.

Max. permitted dissipation power of the capacitor  $P_L$ : depend on the cooling conditions.

Test voltage between terminals:  $1,25 \times U_R$ , 1min. at +25°C

All capacitors are tested by the routine test by the manufacturer

### Protection against Overvoltages:

The capacitors are self-healing and regenerate themselves after occasional breakdowns. The capacitor remains fully functional after the breakdown.

### Permitted Overvoltages in working conditions:

$1,10 \times U_R$  max. 30% of the service period

$1,15 \times U_R$  max. 30min./day

$1,20 \times U_R$  max. 5min./day

$1,30 \times U_R$  max. 1min./day

If the Overvoltages exceed the permissible values above, the capacitor might have been destroyed.

### Test voltage between terminals and case:

3000VDC, 1min. at +25°C

### Max. repetitive rate of voltage rise $dU/dt$ :

< 1000V/µsec at  $U_R$  and +25°C

Max. peak current  $I_p$ : <  $C_R \times dU/dt$

Terminals: special

Related standards: IEC 60384-1, IEC 60384-17

Marking for purchase ordering: KPI 300-105

**Warning!** The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, please, read carefully this technical data-sheet.